


## Canister Type Digital Load Cell

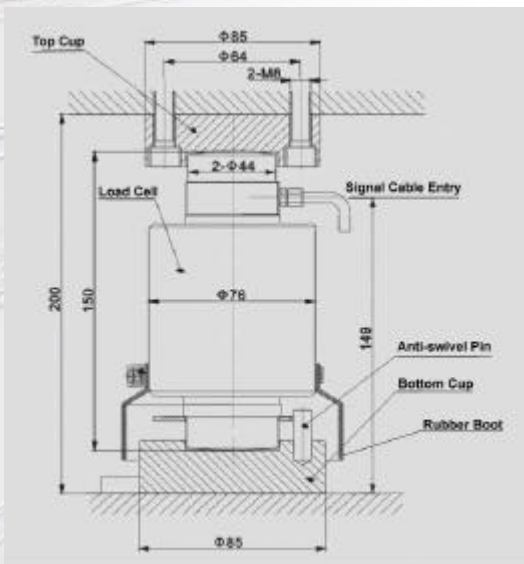

**Griffith Elder and Company Ltd**  
1 Oaklands Park  
Bury St Edmunds  
Suffolk  
IP33 2RW  
United Kingdom

Telephone: +44 1284 763616  
Fax: +44 1284 700822  
Email: sales@griffith-elder.com  
Internet: www.griffith-elder.com

<b>Material</b>	Carbon Alloy Steel
<b>Model: CT-15T-CD</b>	Capacity 15,000 kg
<b>Model: CT-20T-CD</b>	Capacity 20,000 kg
<b>Model: CT-30T-CD</b>	Capacity 30,000 kg
<b>Model: CT-50T-CD</b>	Capacity 50,000 kg

<b>Temperature Range</b>	-40 to +70°C
<b>Safe Overload</b>	150%
<b>Maximum Overload</b>	200%
<b>Cable</b>	Connector IP68
<b>Ingress Protection</b>	Sealed to IP68
<b>Excitation</b>	

Recommended	10V to 12V dc
Maximum	15V dc
Minimum	7.5V dc

**Output at rated load** Weightel™ Protocol RS485