


Shear Beam Loadcell 1 tonne capacity

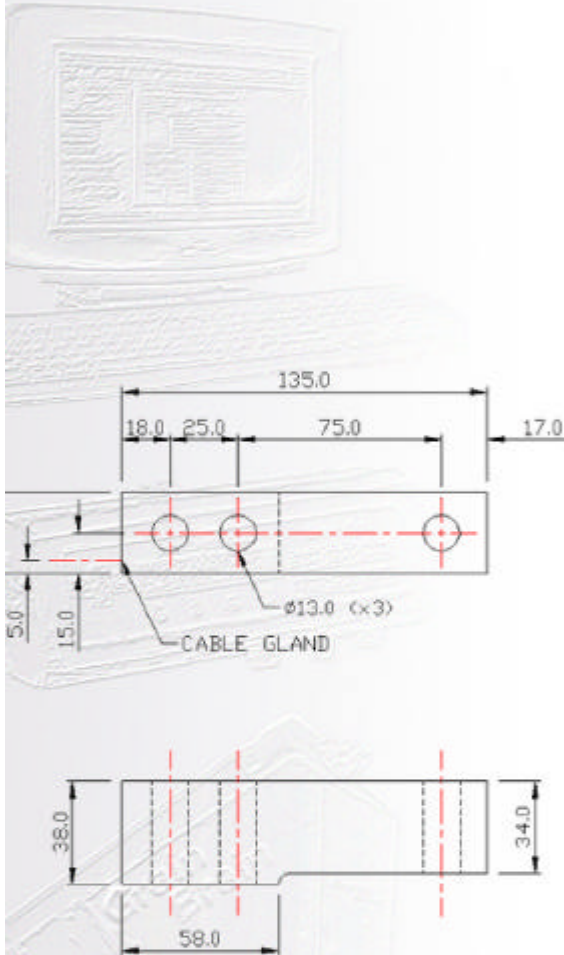

SB-1T-CA **SB-1T-SA**

| | |
|-----------------------------|---|
| Model | SB: Shear Beam |
| Capacity | 6T: 6,000 kg |
| Material | C: Carbon Alloy Steel S: Stainless Steel 17-4 PH |
| Type | A: Analogue |
| Temperature Range | -40 to +70°C |
| Safe Overload | 150% |
| Maximum Overload | 300% |
| Cable | A: 7 metre screened (23 feet) |
| Ingress Protection | Sealed to IP68 |
| Excitation | |
| Recommended | 5V to 12V dc |
| Maximum | 15V |
| Output at rated load | A: 2 mV/V \pm 0.1% |

Griffith Elder and Company Ltd
1 Oaklands Park
Bury St Edmunds
Suffolk
IP33 2RW
United Kingdom

Telephone: +44 1284 763616
Fax: +44 1284 700822
Email: sales@griffith-elder.com
Internet: www.griffith-elder.com