


S Type Load cell 30 tonnes

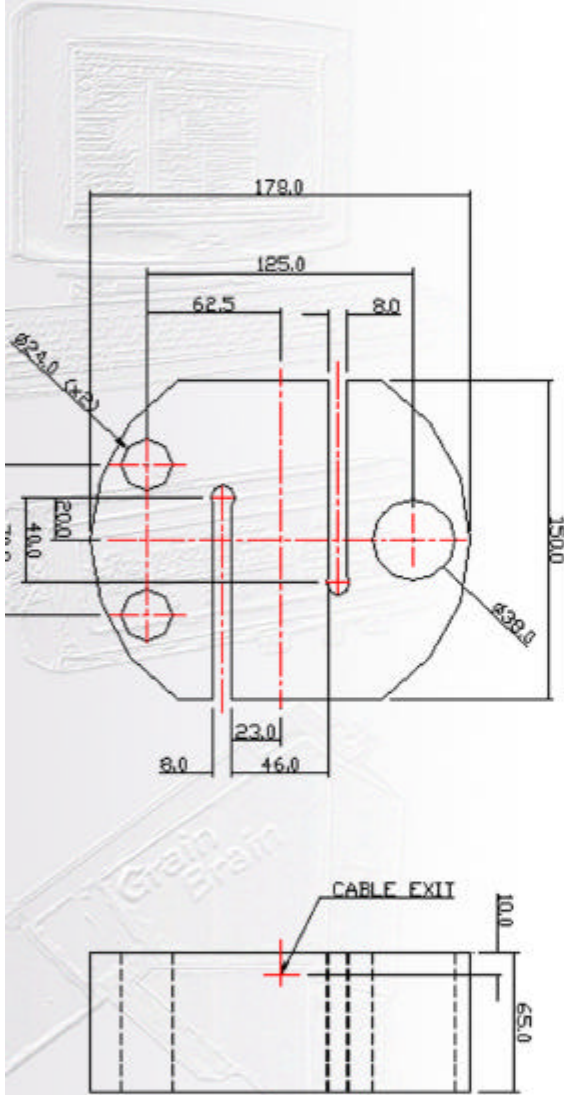

ST-30T-CA
ST-30T-SA
ST-30T-CD
ST-30T-SD

Model	ST: S type
Capacity	30T: 30,000 kg
Material	C: Carbon Alloy Steel S: Stainless Steel 17-4 ph
Type	A: Analogue D: Digital
Temperature Range	-40 to +70°C
Safe Overload	150%
Maximum Overload	300%
Cable	A: 10 metre screened (33 feet) D: Connector
Ingress Protection	Sealed to IP68
Excitation	
Recommended	10V to 12V dc
Maximum	15V
Output at rated load	A: 2 mV/V \pm 0.1% D: Weightel Protocol

Griffith Elder and Company Ltd
 1 Oaklands Park
 Bury St Edmunds
 Suffolk
 IP33 2RW
 United Kingdom

Telephone: +44 1284 763616
 Fax: +44 1284 700822
 Email: sales@griffith-elder.com
 Internet: www.griffith-elder.com

Type	Capacity	Material	Output
ST	30 tonnes	C	A